




H \fYY!hYf a]bU` dcg]h]jY' jc`hU[Y'fY[i`Uhcf

: 95HIF9G''
 T æçâ { ~ { Á [~ c] ~ cÁ & ~ ! : ^ } cÁQU T KÁ€ÉFCEÁÁ
 U ~ c] ~ cÁç [| cæ * ^ XUKÁÉFGXÁÁ
 Ô [] cá } ~ [~ • Ác [cæ] á á • • á } æcá []
 Ú ÖKÁ€É T G Í Á Y ÁçÁÁ V ÁÁæMÁG Í Á ÁDÁ

A97<5B=75@*85H5
 Ôæ•^KÁVUEJGÁÚ { æ||ÁU ~ c]á } ^ÁÚ|æ•cá&ÁÚæ&\æ*^
 Ú [|æ!æ^K Ô [| [! àæ } á á ^ } [c^• &æc@ [á ^ ^ } á
 T [~ } cá } * Ú [• á cá [] K CE) ^

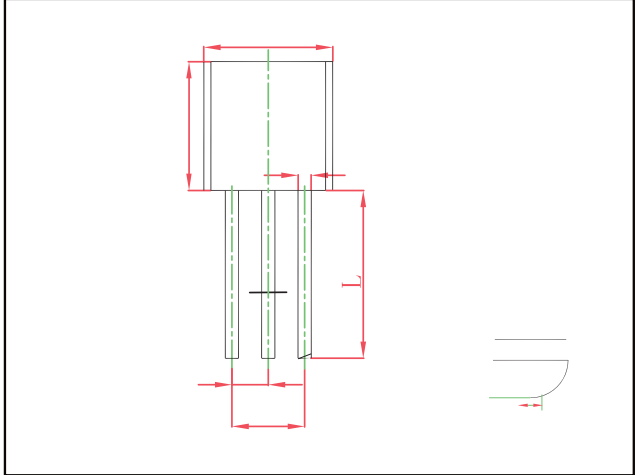

Parameter	Symbol	Value	Unit
Input Voltage	V_i	-35	V
Thermal Resistance from Junction to Ambient	R_{JA}	200	°C/W
Operating Junction Temperature Range	T_{OPR}	0~+150	°C
Storage Temperature Range	T_{STG}	-65~+150	°C

