

V@ã•Á•^!ã•ã•ÁVŠH|ã•c^ã~ } á^!Ác@^ÁÜ^&[ã!ã: ^ãÁ
 &[{] [] ^ } cã) á^ã!ã-ã/ã) ~ { à^!ÁÖFIGÌFI
 V@^Á] |ã•cã&Á { æc^!ãæ|ã~ •^ã&æ!ã^•ÁW) á^, !ãc^!•Šæà[!æc[!^
 Á-|æ { { æàã|ãc^Á!^&[* }ãcã[] ÁJ I X È ! &
 "S\$ T^MEN÷"pU" ð'P P ì < ! `‰—E ,iu\$~C)\$

Tb@T âV%¼SÀ b F U^tQEY)S...f8'@SYMBØDB A" CMµ?!\!4 x K Q |c|AUR! %"ÛSðÄb Amp ° 7Ä 7Ä U" 2CMµ?\!4 x K Q |c|AUB! "

	RRM								
	VRWM								
	CJ								

RATINGS AND CHARACTERISTIC CURVES

Fig. 1 Derating Curve for Output Rectified Current

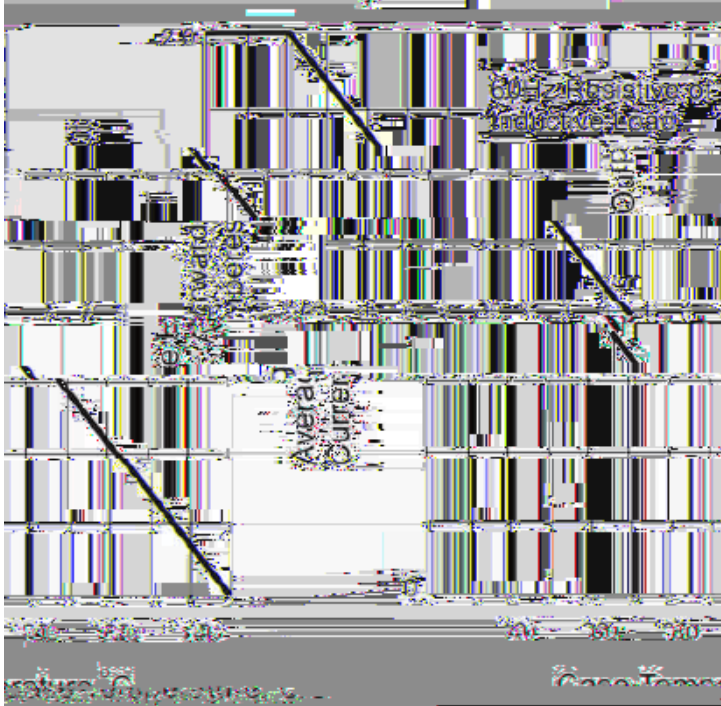


Fig. 2 Maximum Non-repetitive Peak Forward Surge Current



Fig. 3 Typical Instantaneous Forward Characteristic


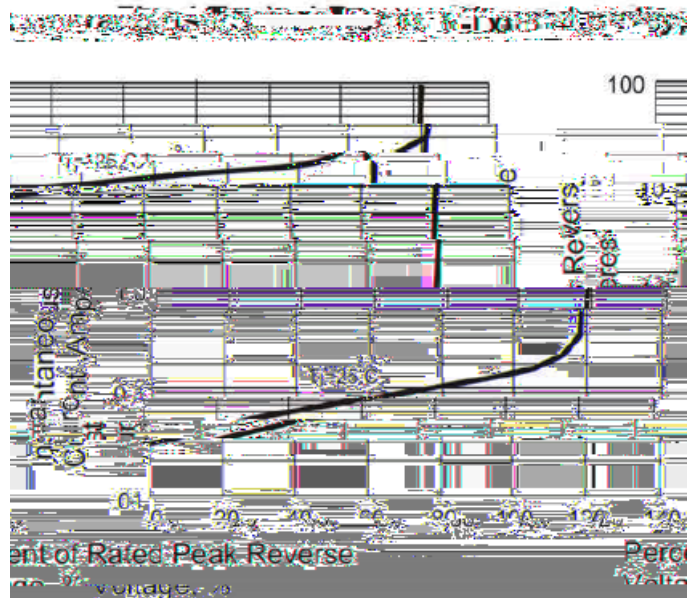


Fig. 5 Typical Derating Curve

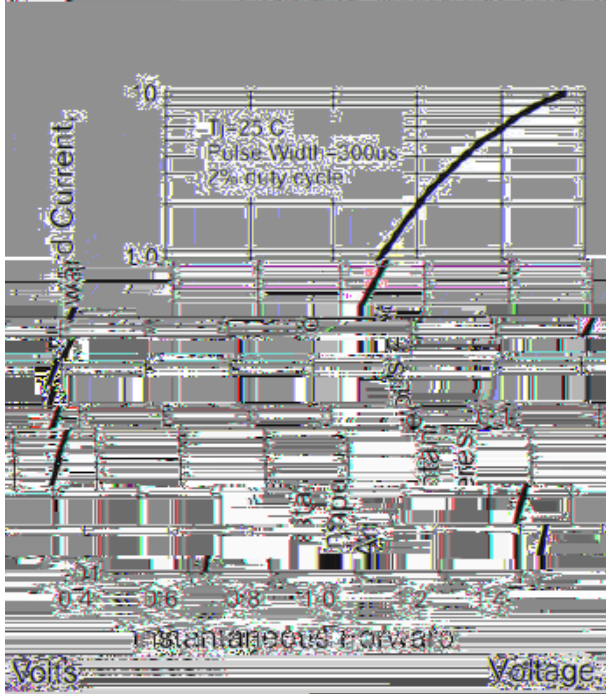