
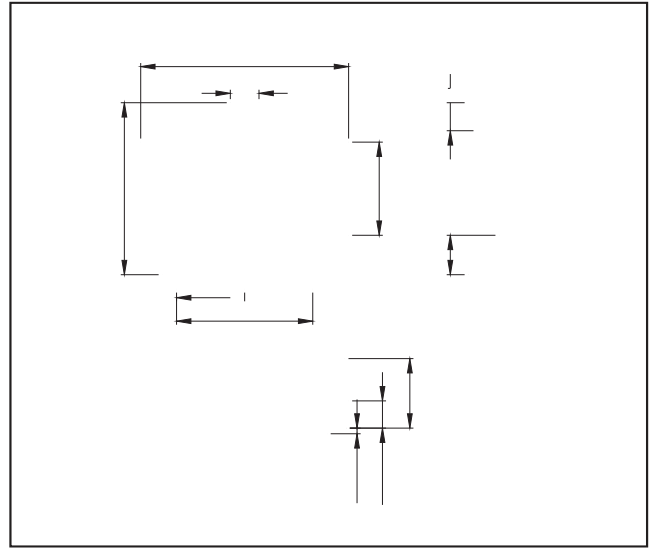


JC@H5 ; 9'F5B ; 9.'(\$J' D95?'DI@G9'DCK9F.&)\$a K



	Continuous Reverse Voltage	40	V
	Continuous Forward Current	100	mA
	Peak Forward Surge Current	1	A
	Power Dissipation	250	mW
	Thermal Resistance from Junction to Ambient	400	/W
	Junction Temperature	125	
	Storage Temperature	-55~+150	

DUfU a YhYf'	Gma Vc''	HYgh'WcbX]h]cbg'	A]b'	Hmd'	AUI'	I b]h'
FYjYfgY' jc'hU[Y'						
FYjYfgY'Wi ffYbh'						
: cfkUfX' jc'hU[Y'						
HchU' WUdUW]hUbWY'						

A5F?-B ; .8'@'

