



Unit: mm

RS3A~RS3M

SMA PLASTIC SILICON RECTIFIERS

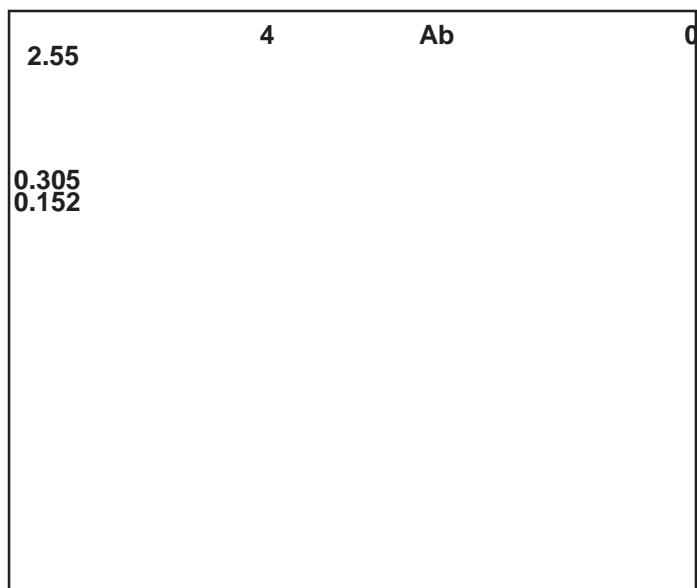

3MAX.


MAXIMUM RATINGS AND CHARACTERISTICS

f & \$ P E L H G W S H U D X X O R H W K H U Z R L W H G

RATINGS AND CHARACTERISTIC CURVES

*7&3" (80 3 8 " 33% \$ 5 * " & 863 3 & / 5
1 & 3 & 4


'*('038" 3 % 633 & % 3 " 5 * \$ 3 7 &

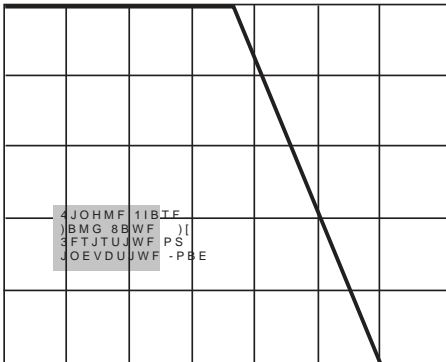

".#*&/5 5&.1&863& \$

'*(. "9*.6. /0/ 3&1&5*7& 1&," "03/8
463(& \$633&/5


b 1 & " , 0 3 8 " 34% 3 (86 3 3 & / 5
1 & 3 & 4

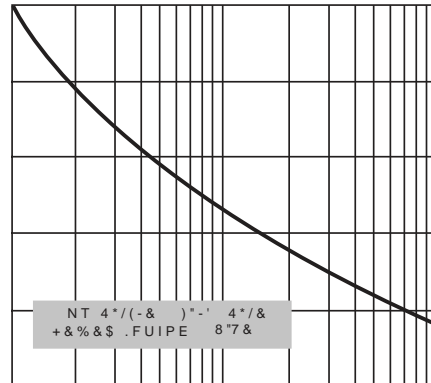

/6.#&3 0' \$:-&45")]

'*(5:1*\$"-*/45"/5"/&064 '033%
\$)"3"\$5&3*45*\$4


*/45"/5"/&0088"3%
\$633&/5 .1&3&4

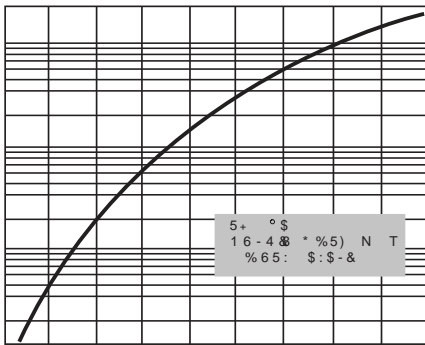

*/45"/5"/&064 '033% 70-&" (& 70-54

'*(5:1*\$"- 3&7&34& \$)"3"\$5&3*45*\$4


*/45"/5"/&087&38&33&/5
\$30".1&3&4

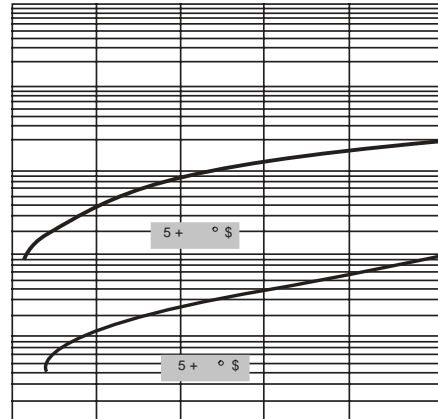

1&3\$&/5 0' 1&," 3&7&34&"(80-

'*(5:1*\$"- +6/\$5*0/ \$"1"\$*5"/\$&


+ 6 / \$ 5 * 0 7 1 " \$ * 5 " / 3 &

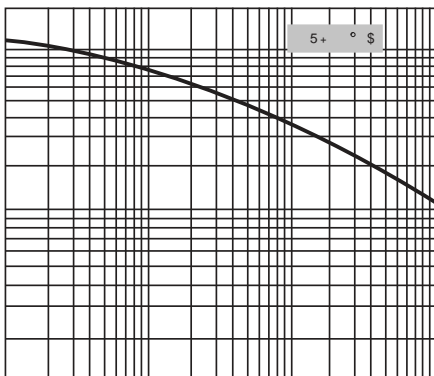

3&7&34& 750 (& D-54

5 3 " / 4 * & 5 / 5 8 3 . " ± . 1 & % " / \$ &
0

'*(5:1*\$"53"/4*&5/5&3."±.1&%"/\$&

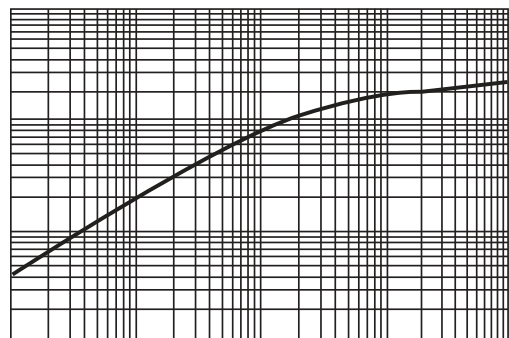

U 16-4& %63"5*0/ TFD