



S 2')/ PLASTIC SILICON RECTIFIERS

)(\$785(6

"/RZ SURILOH VSDFH
 ", GHDO SDVVLYDWHG FKLS MXQFWLRQV
 "/RZ IRUZDUG YROWDJH GURS
 "+LJK IRUZDUG VXUJH FDSDELOLW\
 "+LJK WHP SHUDWXUH VROGHULQHFRQGDOWHHG
 WHUPLQDOV
 "& RPSRQHQWLQD F5RR+UQDQ86H VRQG :((
 2012/19/EU

MECHANICAL DATA

"& DVH 62')/ PROGHG SODVWLFERG\RYHU JODVV SDVVLYDWHG FKLS\$
 "7HUPLQDOV 6ROGHU SODWHG VROGHUDEOH SHU - 67' % DQG
 -(6' %)
 "3RODULW\ & RORUEDQGGHQRWHV FDWKRGHHQG

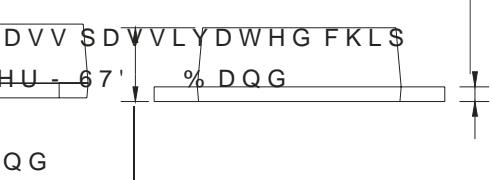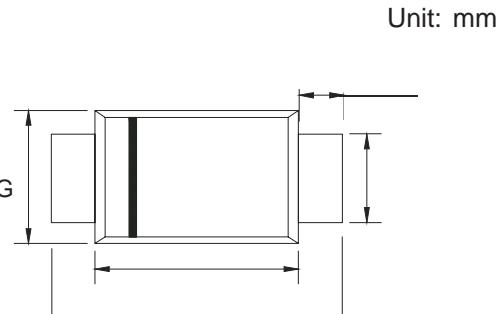

MAXIMUM RATINGS AND CHARACTERISTICS

f & P E L H Q TS H U D X Q Q R H W K H L Q Z L W H G


& K D U D F W H U L V W L F	6<0%2/	62' '65 \$	62' '65 %	62' '65 '	62' '65 *	62' '65 -	62' '65 .	62' '65 0	81,76
OD[L P XPH F X USUHDQNY HYURQHW DJH OD[L P X& E O R F M R Q J W D J H	9 ₅₀ 9 _{&}								9
OD[L P X 6 9 R O W D J H	9 ₅₀₆								9
\$ Y H U D J H F W R X L V H G K W U H Q W	,2 \$ 9								\$
1 R Q 5 H S H 3 W H D Y H D U X G J & H U U H Q W V L Q K Q D L Q H Z D X S H H U L P B R Q D H G H O R D G - ('(& P H W K R G	9 ₆₀								\$
) R U Z D Q R Q W D J H \$	9,								9
3 H D N H Y H & X H U D H Q D W & G	@T _A =25°C @T _A =100°C	50							-\$
E O R F M R Q J W D J H									
Thermal resistance from junction to ambient (Note 1)	5 -/								\$
7 \ S L F D Q U B B O L V W Q F W A S P C E L H Q W 1 R W H	5 - \$:
2 S H U D T H L P Q J H U B W Q W H H	7 _M				5 WR				

127(6

0 R X Q W H G R Q) 5 3 & % Z L W K 1 P P F R S H U S D G D U H D V § P W K L F N


RATINGS AND CHARACTERISTIC CURVES

&I\$PMM&8- f d-°ä !— “èðæ”-døè\$ä !-i “

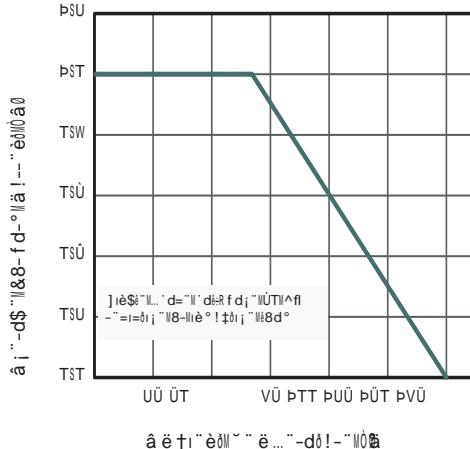

&I\$SUMM~5...!‡dè“ä!—“èðæ”-døè\$ä !-i “

ä . d-d‡ð“-i=ð‡=

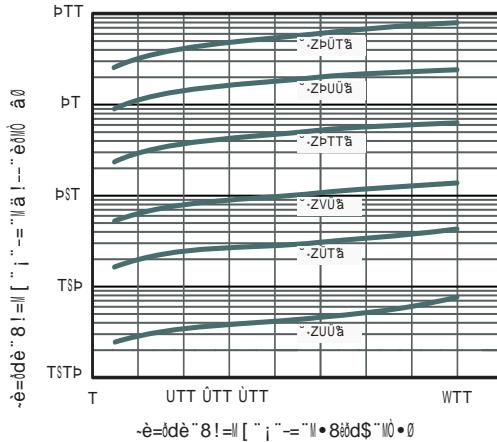

&I\$SUMM~5...!‡dè“ä!—“èðæ”-d-d‡ð“-i=ð‡=

&I\$SUMM~5...!‡dè“ä!—“èðæ”-d-d‡ð“-i=ð‡=

